


WIRING INSTRUCTIONS


!!! READ BEFORE INSTALLATION !!!

FAILURE TO FOLLOW THE INSTRUCTIONS CAN RESULT IN DAMAGE TO THE PRODUCT AND VOIDING OF WARRANTY

Read all instructions before installing the product. For detailed instructions and videos, visit <https://rhinoledlights.com/pages/help/install>

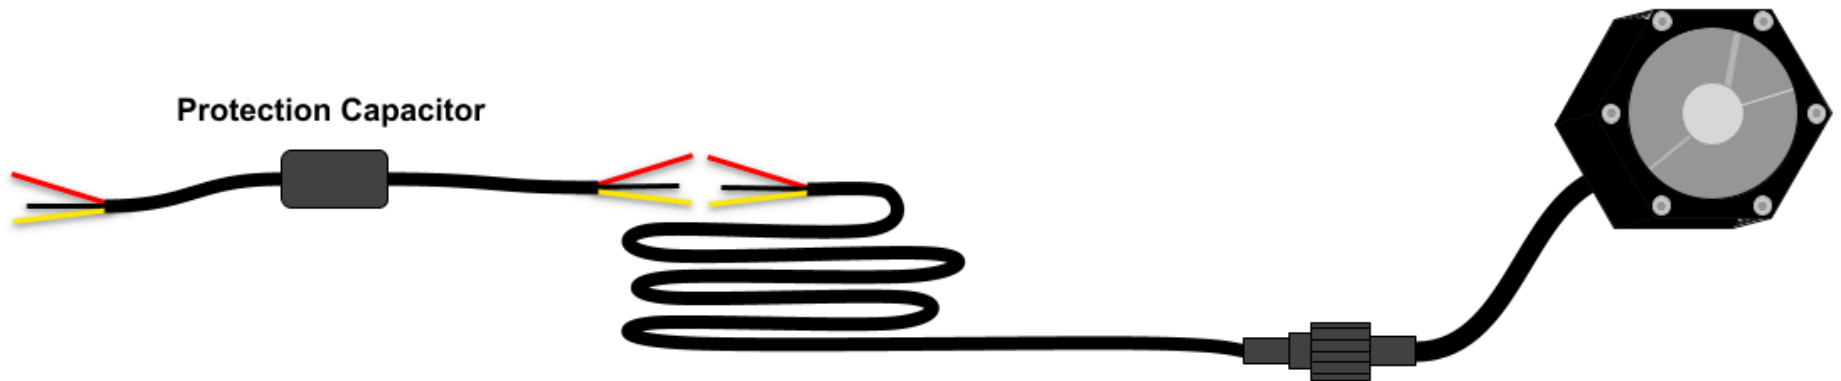

For dual color Pod Lights: Connect wires to a switch to toggle between the main (white) light and the accent (color) light. The main (white) light runs off the **RED** wire and the accent (color) lights run off the **YELLOW** wire. The **BLACK** wire is ground and can be wired to the ground pin of the switch or directly to the negative terminal of the battery.

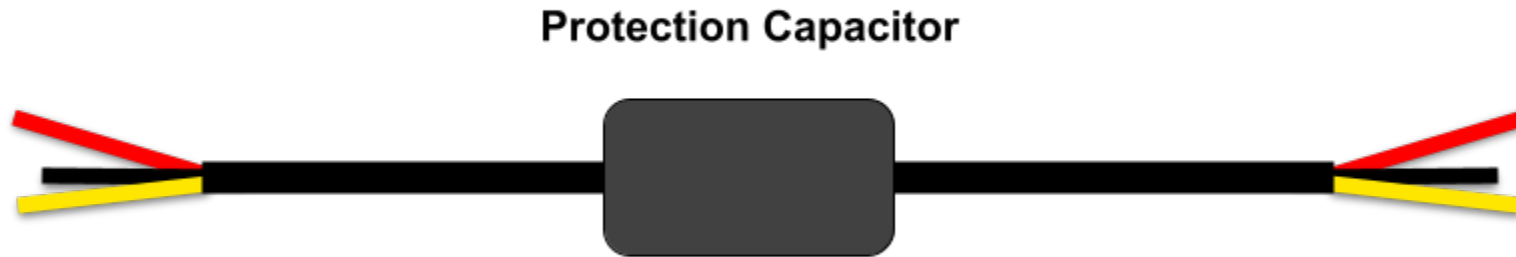

- ◆ A protection capacitor cable has been included with these lights. ◆
- ◆ The protection capacitor cable **must** be inserted between the lights/splitters and the switch or power source. ◆
- ◆ The capacitor is wired into a section of whip wire with raw ends, please follow instructions for color matching the wires given in the above assembly instructions. ◆
- ◆ Please note that the yellow wire on the capacitor assembly may be replaced with a white wire, in which case the white wire would be connected to the yellow data wire. ◆
- ◆ Unless otherwise stated, use one capacitor wire per pair of pod lights. ◆
- ◆ Do not take apart the capacitor assembly. ◆